


## Telescopic Decanter

The product group consists of standard type units. The technology and size-dependent structural units may vary.

The material of decanter: the parts in contact with water are made of stainless steel, other parts (podium, drive foundation) are made of carbon steel, zinc-coated.

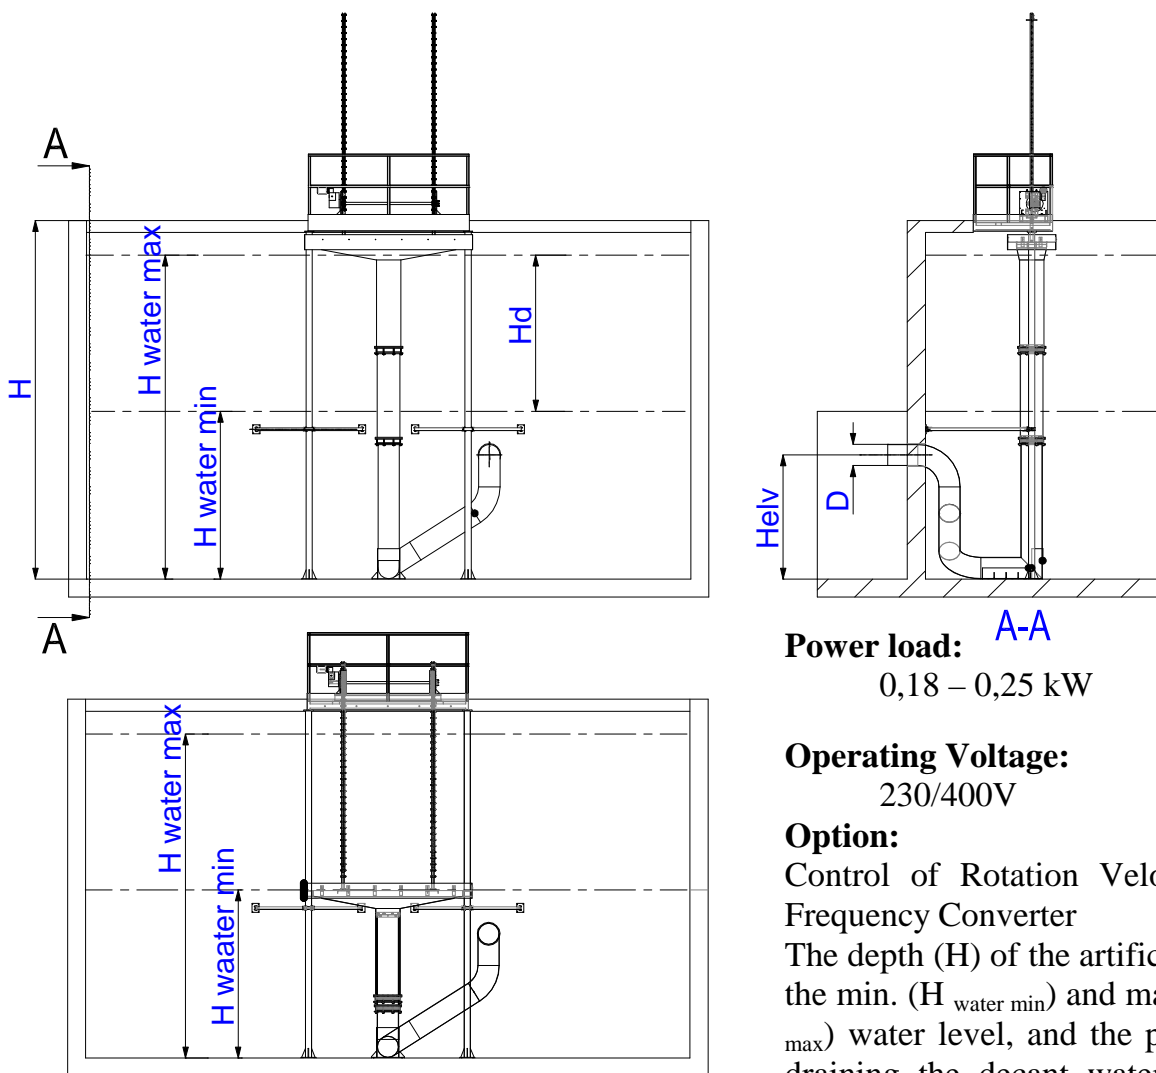

**Power load:** A-A  
 0,18 – 0,25 kW

**Operating Voltage:**  
 230/400V

**Option:**

Control of Rotation Velocity with Frequency Converter

The depth (H) of the artificial object, the min. ( $H_{\text{water min}}$ ) and max. ( $H_{\text{water max}}$ ) water level, and the position of draining the decant water shall be separately specified for issuing an order.

**Mode of Ordering:** DEK-T - 1,8 / 4,5 / 2

Length of Decantation Hd      ↑      ↑      ↑      Time of Decantation (h)  
 Installation depth H (m)