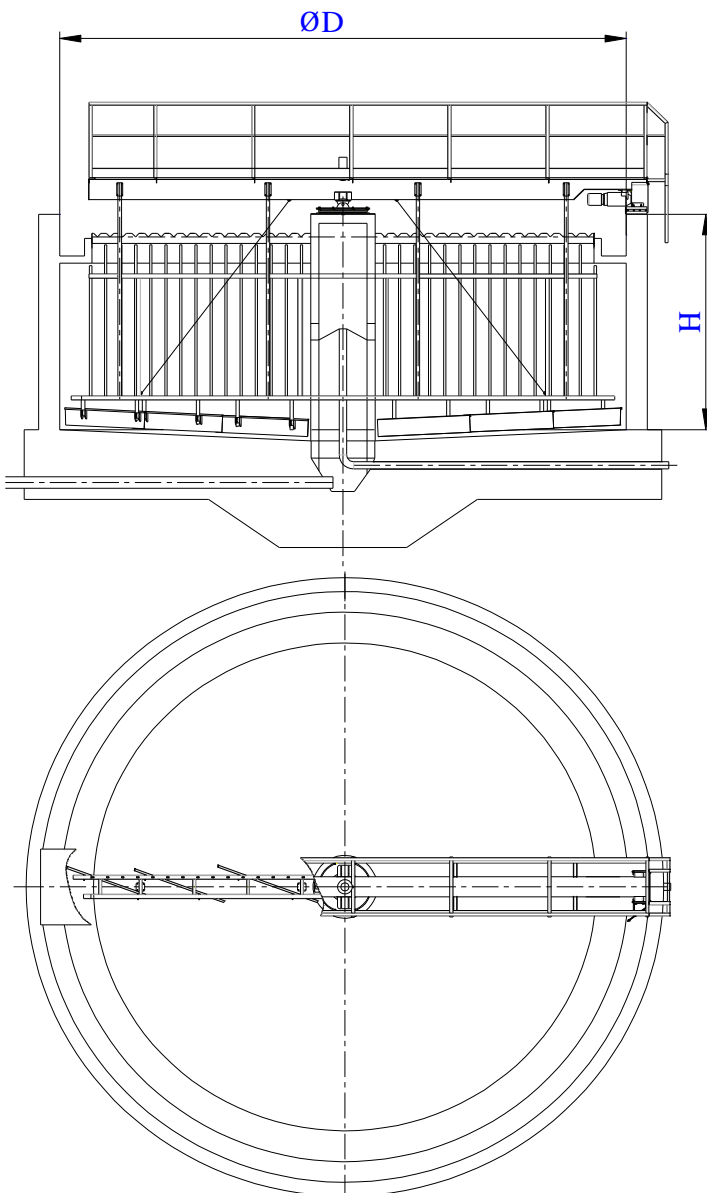


Peripheral drive bar sedimentator

The product group consists of standard type units. The technology and size-dependent structural units may vary..


Inclination of the bridge:

L/200, L/400

Power load:

0,18-0,37 kW

Peripheral speed:

0,03 m/s

Inner diameter of structure to 0-50 m (ØD)

Material of the bridge: the parts contacting the water are made of anti-corrosion steel, other parts are of carbon steel, zinc-coated, anti-corrosion steel, or glass-fibre reinforced plastics, depending on the size

Example:

KFK-S-10,0 / 3,5

Mode of Ordering:

KFK-S - /

↑
Inner diameter of structure (ØD) m

↑
Structure depth m