


Peripheral drive dredger blade sedimentator

The product group consists of standard type units. The technology and size-dependent structural units may vary.

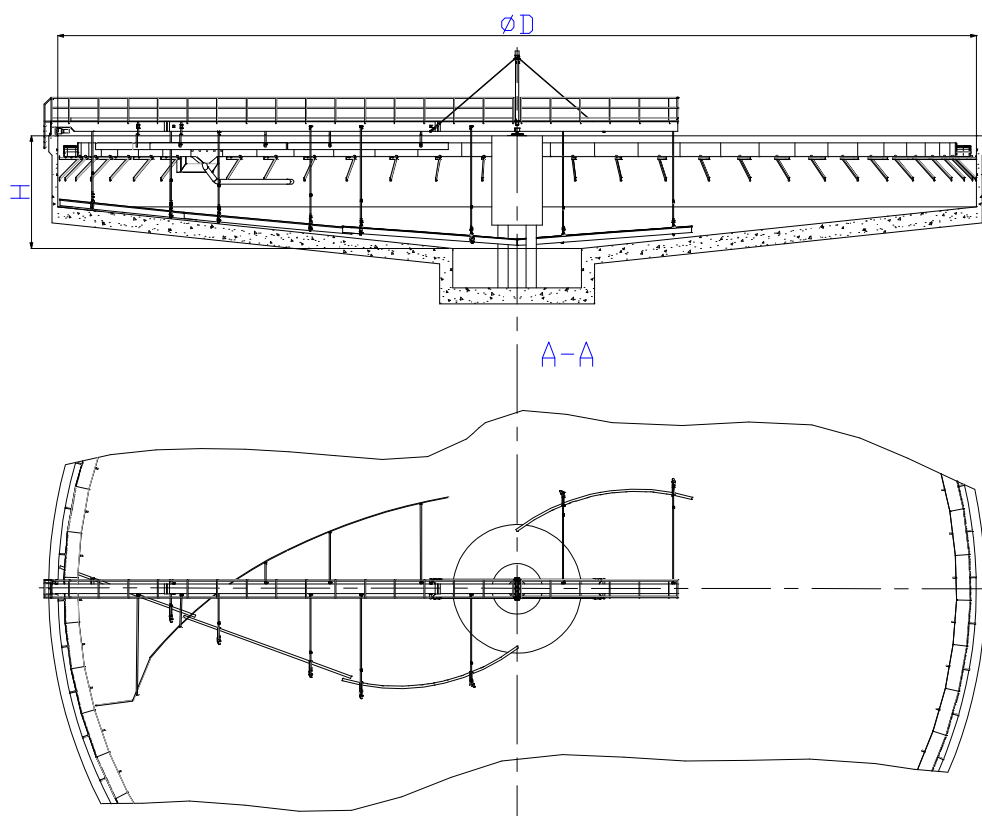

Inclination of the bridge:	Power load:	Peripheral speed:	Inner diameter of structure
L/200, L/400	0,18-0,37 kW	0,03 m/s	to 0-50 m (ØD)

Material of the bridge: the parts contacting the water are made of anti-corrosion steel, other parts are of carbon steel, zinc-coated, anti-corrosion steel, or glass-fibre reinforced plastics, depending on the size

Example:

KFK-UL-18,0 / 3,5

Mode of Ordering:

KFK-UL- /



Structure depth (m)

Inner diameter of structure (ØD) (m)