


"SZ-ZS"-TYPE, FOUR-SIDED CLOSED REGULATOR FLOOD-GATE

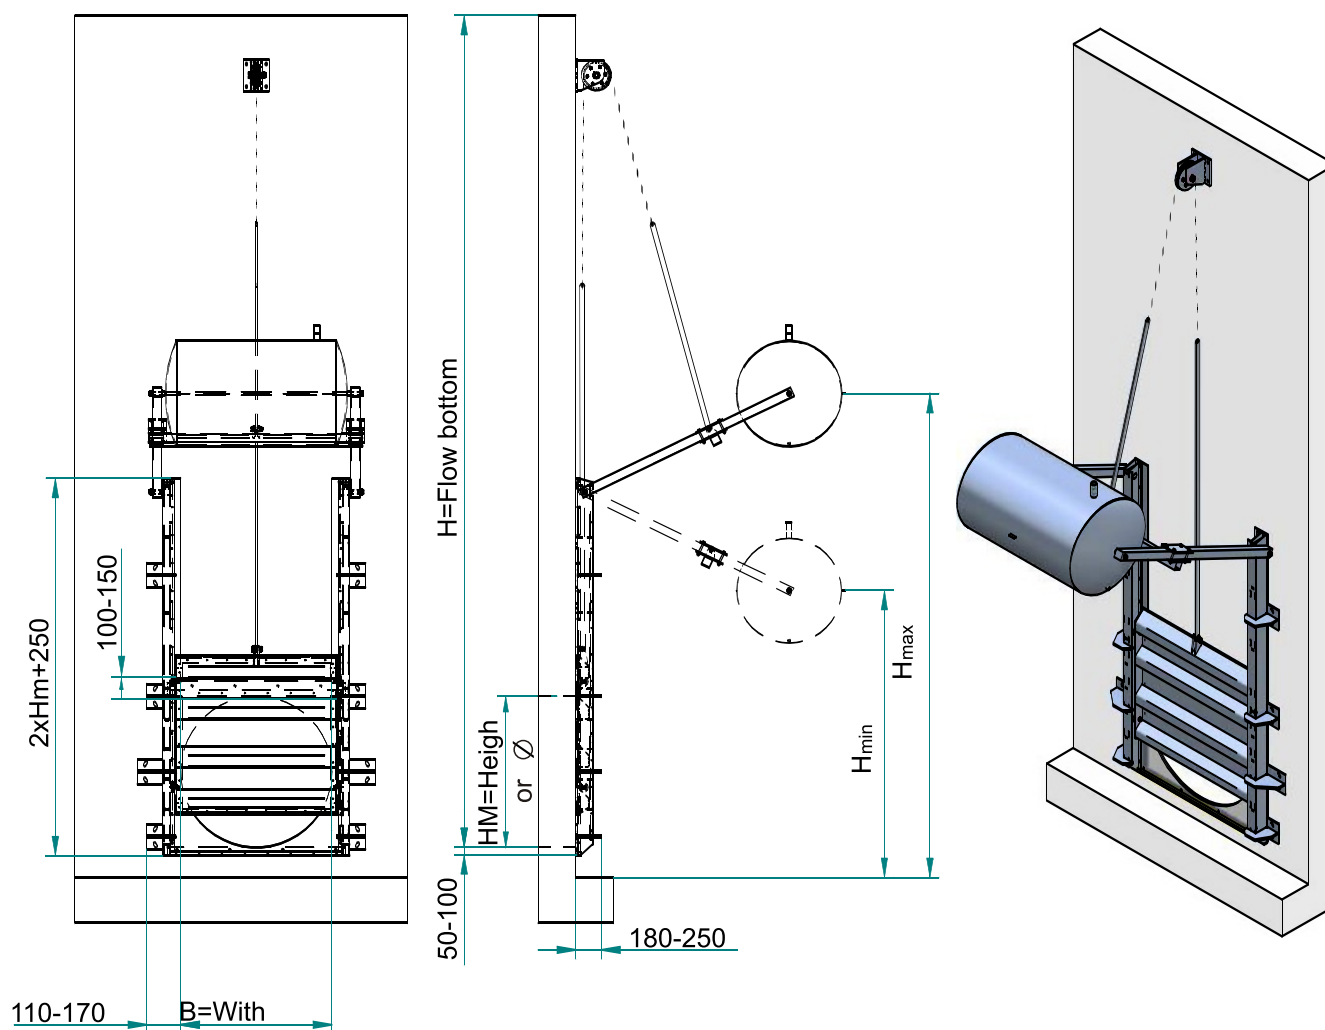

Purchase order sample	Type	Size	Installation	Material	Operation
	SZ-ZS-	BxHMxH	-F	-1	-U

SZ-ZS

SELECTION

STANDARD DIMENSIONS	BxHM or	DN	
	400x400	Ø400	To the circle profile orifice to be made a rectangular section's flood-gate too with throttle plate what is corresponding to the size and shape of the orifice.
	500x500	Ø500	
	600x600	Ø600	
	800x800	Ø800	
	1000x1000	Ø1000	
	1200x1200	Ø1200	
	1500x1500	Ø1500	
	Gate valves for sluices can also be custom made.		

Installation

Wall-mounted	F
Embedded in concrete	B

Material

Wnr.: 1.4301	1
Wnr.: 1.4541	2
Wnr.: 1.4571	3
St52C hot galv.	4

Operation

Floating	U
----------	---

Size (mm)

B Opening width	
HM Opening height or	
DN Opening diameter	
H Flow bottom	
H _{max} max. water level	
H _{min} min. water level	
Q _{max} (l/s) or (%)	
Q _{min} (l/s) or (%)	