


Center drive siphon sedimentator

The product group consists of standard type units. The technology and size-dependent structural units may vary.

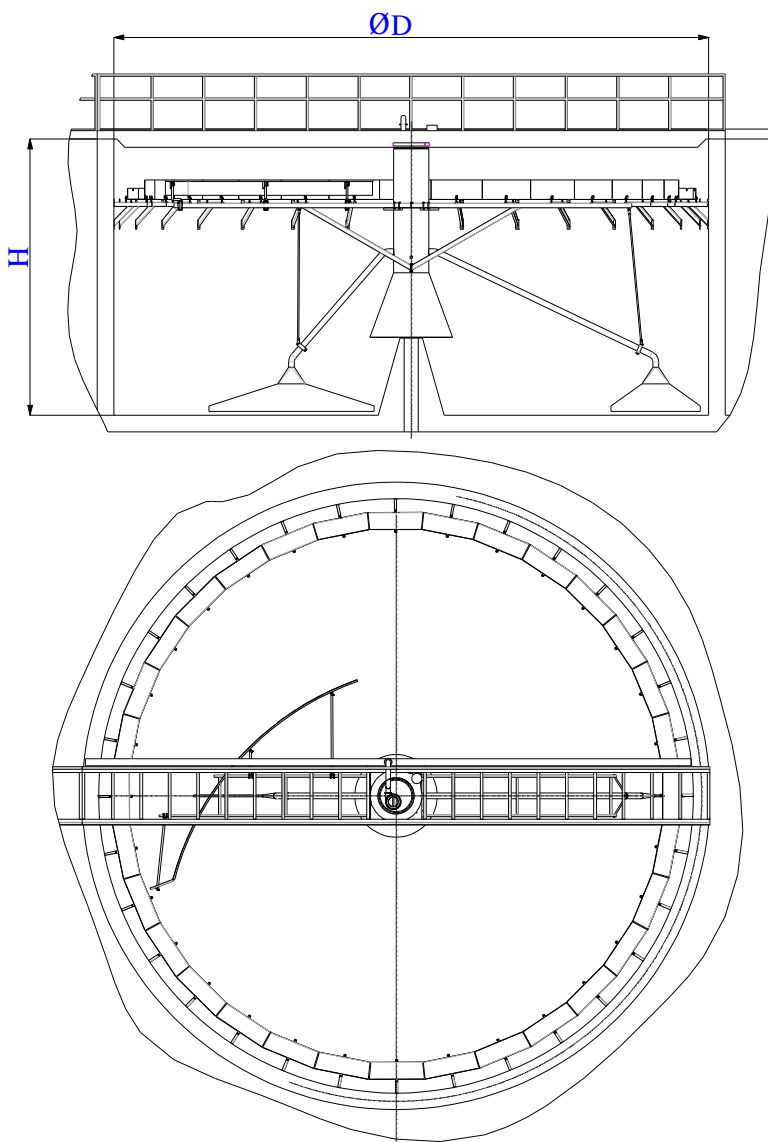

Inclination of the bridge:

L/200, L/400

Power load:

0,18-0,37 kW

Peripheral speed:

0,03 m/s

Inner diameter of structure

(ØD): to 0-50 m

Material of the bridge: the parts contacting the water are made of anti-corrosion steel, other parts are of carbon steel, zinc-coated, anti-corrosion steel, or glass-fibre reinforced plastics, depending on the size

Example:

TFK-US-18,0 / 3,5

Mode of Ordering:

TFK-US- /
 ↑ ↑
 Structure depth (m)
Inner diameter of structure (ØD) (m)