


## MASCHINELL GEREINIGTES FEINGITTER TYP "SR"

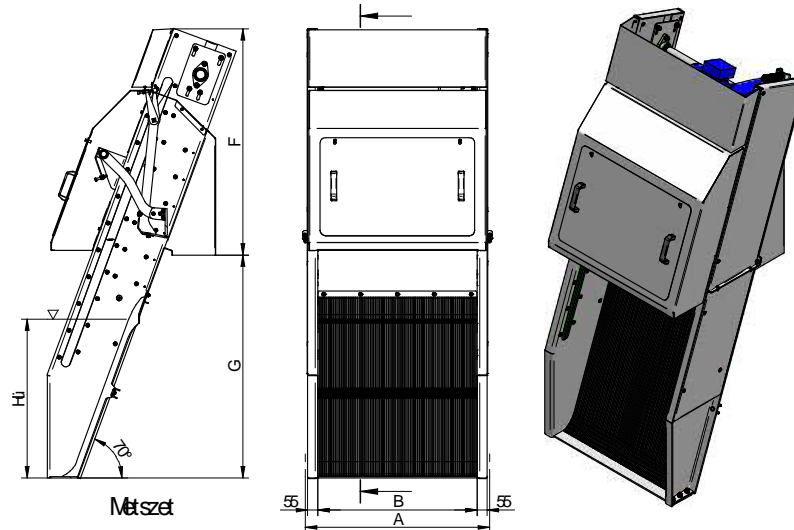

Typ	A [mm]	B [mm]	F [mm]	P [kW]	H Betrieb [mm]	Kommunales Abwasser - Q (m <sup>3</sup> /h)						
						Stabdistanz [mm]						
						5	6	10	15	20	25	30
SR-0,3/...	300	200	1000	0,18	300	53	55	54	55			
					400	70	73	72	73			
					500	80	92	90	92			
					600	105	110	108	110			
SR-0,4/...	400	300	1000	0,18	300	83	88	88	90			
					400	110	117	118	120			
					500	138	146	147	149			
					600	165	176	177	179			
SR-0,5/...	500	380	1000	0,25	300	112	119	119	119			
					400	150	159	158	159			
					500	187	199	198	199			
					600	224	239	238	239			
SR-0,6/...	600	480	1000	0,25	400	202	204	214	219	243	260	274
					600	303	306	321	329	364	390	410
					800	404	408	428	438	485	520	547
					400	315	318	334	342	378	405	427
SR-0,8/...	800	680	1000	0,37	600	473	477	501	513	568	608	640
					800	631	636	668	684	757	811	854
					400	423	427	448	459	508	544	573
					600	635	641	673	689	762	817	860
SR-1,0/...	1000	880	1000	0,55	800	847	854	897	918	1016	1089	1146
					600	775	785	827	847	938	1005	1058
					800	1034	1047	1103	1130	1250	1340	1410
					1000	1292	1308	1379	1412	1563	1674	1763
SR-1,2/...	1200	1050	1250	0,75	1200	1551	1570	1655	1695	1875	2009	2115
					600	1037	1054	1107	1133	1254	1344	1415
					800	1382	1405	1476	1511	1672	1792	1886
					1000	1728	1757	1844	1889	2090	2240	2358
SR-1,5/...	1500	1350	1250	1,5	1200	2074	2108	2213	2267	2508	2688	2829
					800	1797	1881	1903	1949	2157	2311	2433
					1000	2247	2351	2379	2436	2696	2889	3041
					1200	2696	2822	2855	2924	3235	3467	3649
SR-1,8/...	1800	1650	1400	2,2	1500	3370	3527	3568	3654	4044	4333	4561
					800	2059	2095	2180	2252	2493	2671	2811
					1000	2574	2618	2725	2815	3116	3338	3514
					1200	3089	3142	3270	3379	3739	4006	4217
SR-2,0/...	2000	1850	1400	2,2	1500	3861	3927	4088	4223	4674	5008	5271